

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 December 2004 (16.12.2004)

PCT

(10) International Publication Number
WO 2004/108227 A2

(51) International Patent Classification⁷: **A63B 55/00**

(21) International Application Number:
PCT/GB2004/002419

(22) International Filing Date: 7 June 2004 (07.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0313149.7 7 June 2003 (07.06.2003) GB

(71) Applicant and

(72) Inventor: **BREMNER, Nell, Colvin** [GB/GB]; 84
Longhill Avenue, Alloway, Ayrshire KA7 4DY (GB).

(74) Agents: **MACDOUGALL, Donald, Carmichael et al.**;
Marks & Clerk, 19 Royal Exchange Square, Glasgow G1
3AE (GB).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: **A GOLF BAG CONSTRUCTION**

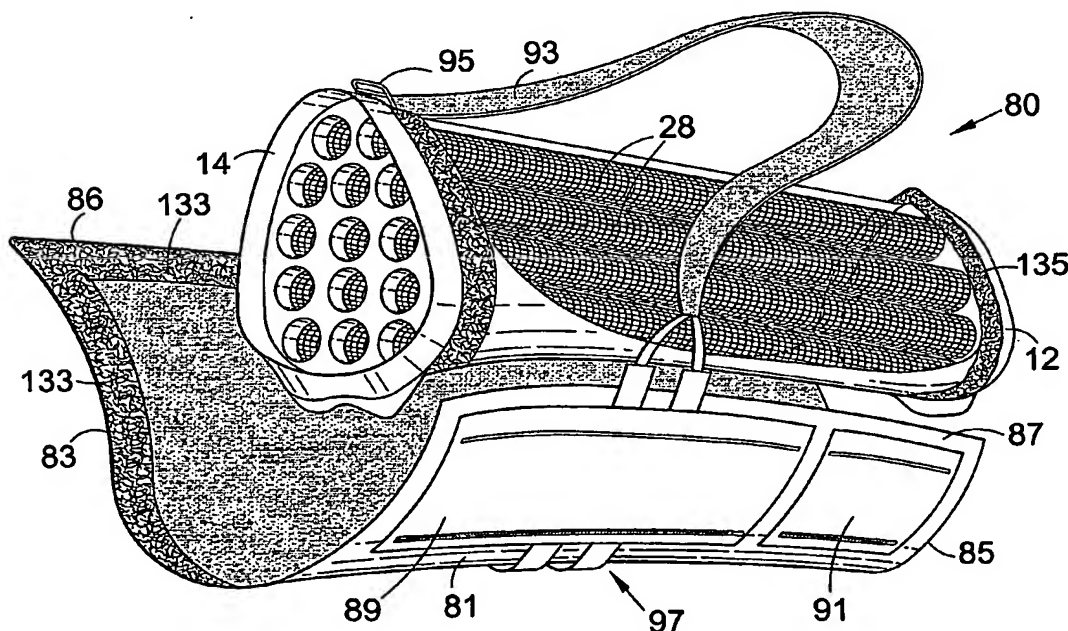

(57) Abstract: This invention relates to a golf bag (10) having a closed base (12) and a top (14) with at least one aperture (26) therethrough so as to receive at least one shaft of a golf club, the base (12) and the top (14) being interconnected by means of at least one tubular member (28) which has its ends secured relative to the base (12) and the top (14), characterised in that the at least one tubular member (28) has a series of apertures (26) through the side walls of the tube (28).